

KATALOG / CATALOG

# Lider

CONTA İMALATI & İNŞ. MALZ.  
SANAYİ & TİCARET LTD. ŞTİ.

40.yıl




HIGH QUALITY ELASTOMERS



[www.ekoer.com.tr](http://www.ekoer.com.tr)



TS EN 681-1

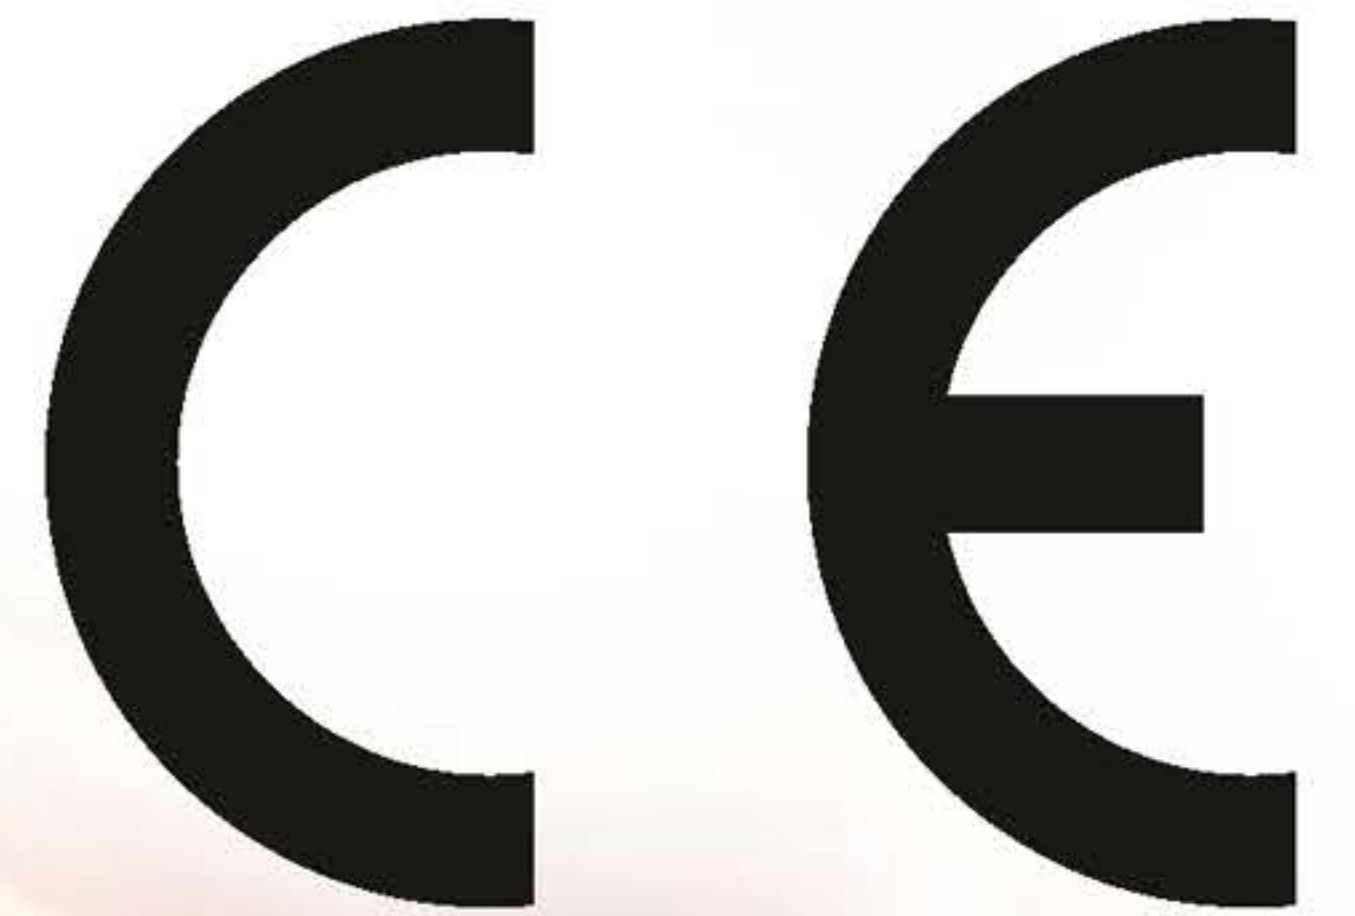

“ 40. Yılımızda 670 Ürün ”

[www.liderconta.com.tr](http://www.liderconta.com.tr) - [www.lcsrubber.com](http://www.lcsrubber.com)





Lider Conta geniş çeşidi ve kalitesi ile hizmet verdiği tüm sektörlerde bugün aranan bir firmadır. Yurtiçi ve Yurtdışı pazarlardan gelen taleplere hem hızlı hemde ekonomik bir şekilde yanıt verirken tecrübe ve uzmanlığımızla müşterilerimizin profesyonel çözüm ortağı olmayı sürdürüyoruz. Pazar payımızı arttırmayı, yardımcı sanayiler arasında en düşük maliyetli üretici olmayı ve kaynak verimliliğini sektör ortalamasının üzerine çıkarmayı hedefleri olarak belirlemiştir.

Lider Conta müşteri isteklerinin karşılanmasında sürekliliğinin sağlanması için yükselmekte ve değişmekte olan beklentilerin önceden tesbiti ile verimliliğin artırılması olarak özetlenebilir. Bu hedeflere, tanımlanan kalite ve süreç hedeflerine ulaşabilme gayesi ile planlı ve sistematik çalışmaları yaygınlaştırma, süreç iyileştirmeleri ve düzenli gözden geçirme prosesleri ile ulaşılması amaçlanmaktadır.

**S a y g ı l a r ı m ı z l a . . .**

With a large variety of high quality products, LCS RUBBER is a highly preferred company in all sectors we serve. While providing quick and economical responses to requests from the domestic market, we continue to be the professional solution partners to our clients through our experience and expertise. LCS RUBBER aims to increase its share of the market, to achieve the lowest manufacturing costs among sub-industries and to raise the resource efficiency beyond market averages.

As LCS RUBBER, our objective is to pre-determine the increasing and changing demands of our clients to improve efficiency in order to constantly meet the demands of our clients. We aim to achieve our objectives by extending planned and systematic activities, process improvements and regular reviewing processes in order to attain the defined quality and phase objectives. Respectfully.





*High Quality Elastomers*

**Leader**  
RUBBER SEALING




**BL SEALS FOR**  
**SEWAGE PIPES AND FITTINGS**



# TECHNICAL DATASHEET


- From
- SBR ACCORDING TO THE EUROPEAN STANDARD EN 681-1 WC
- 60 ± 5 IRHD
- PVC and PP sewer pipes and fittings according to European Standards EN 1401-1 and EN 1451-1

These are high quality elastomer seals in EN-681-1 norms, produced for plastic pipes made according to PVC en 1451-1 standards. It guarantees the highest quality based on years of experience and certified quality standards. Our products are produced with the latest technology involving injection moulding and robotic systems.

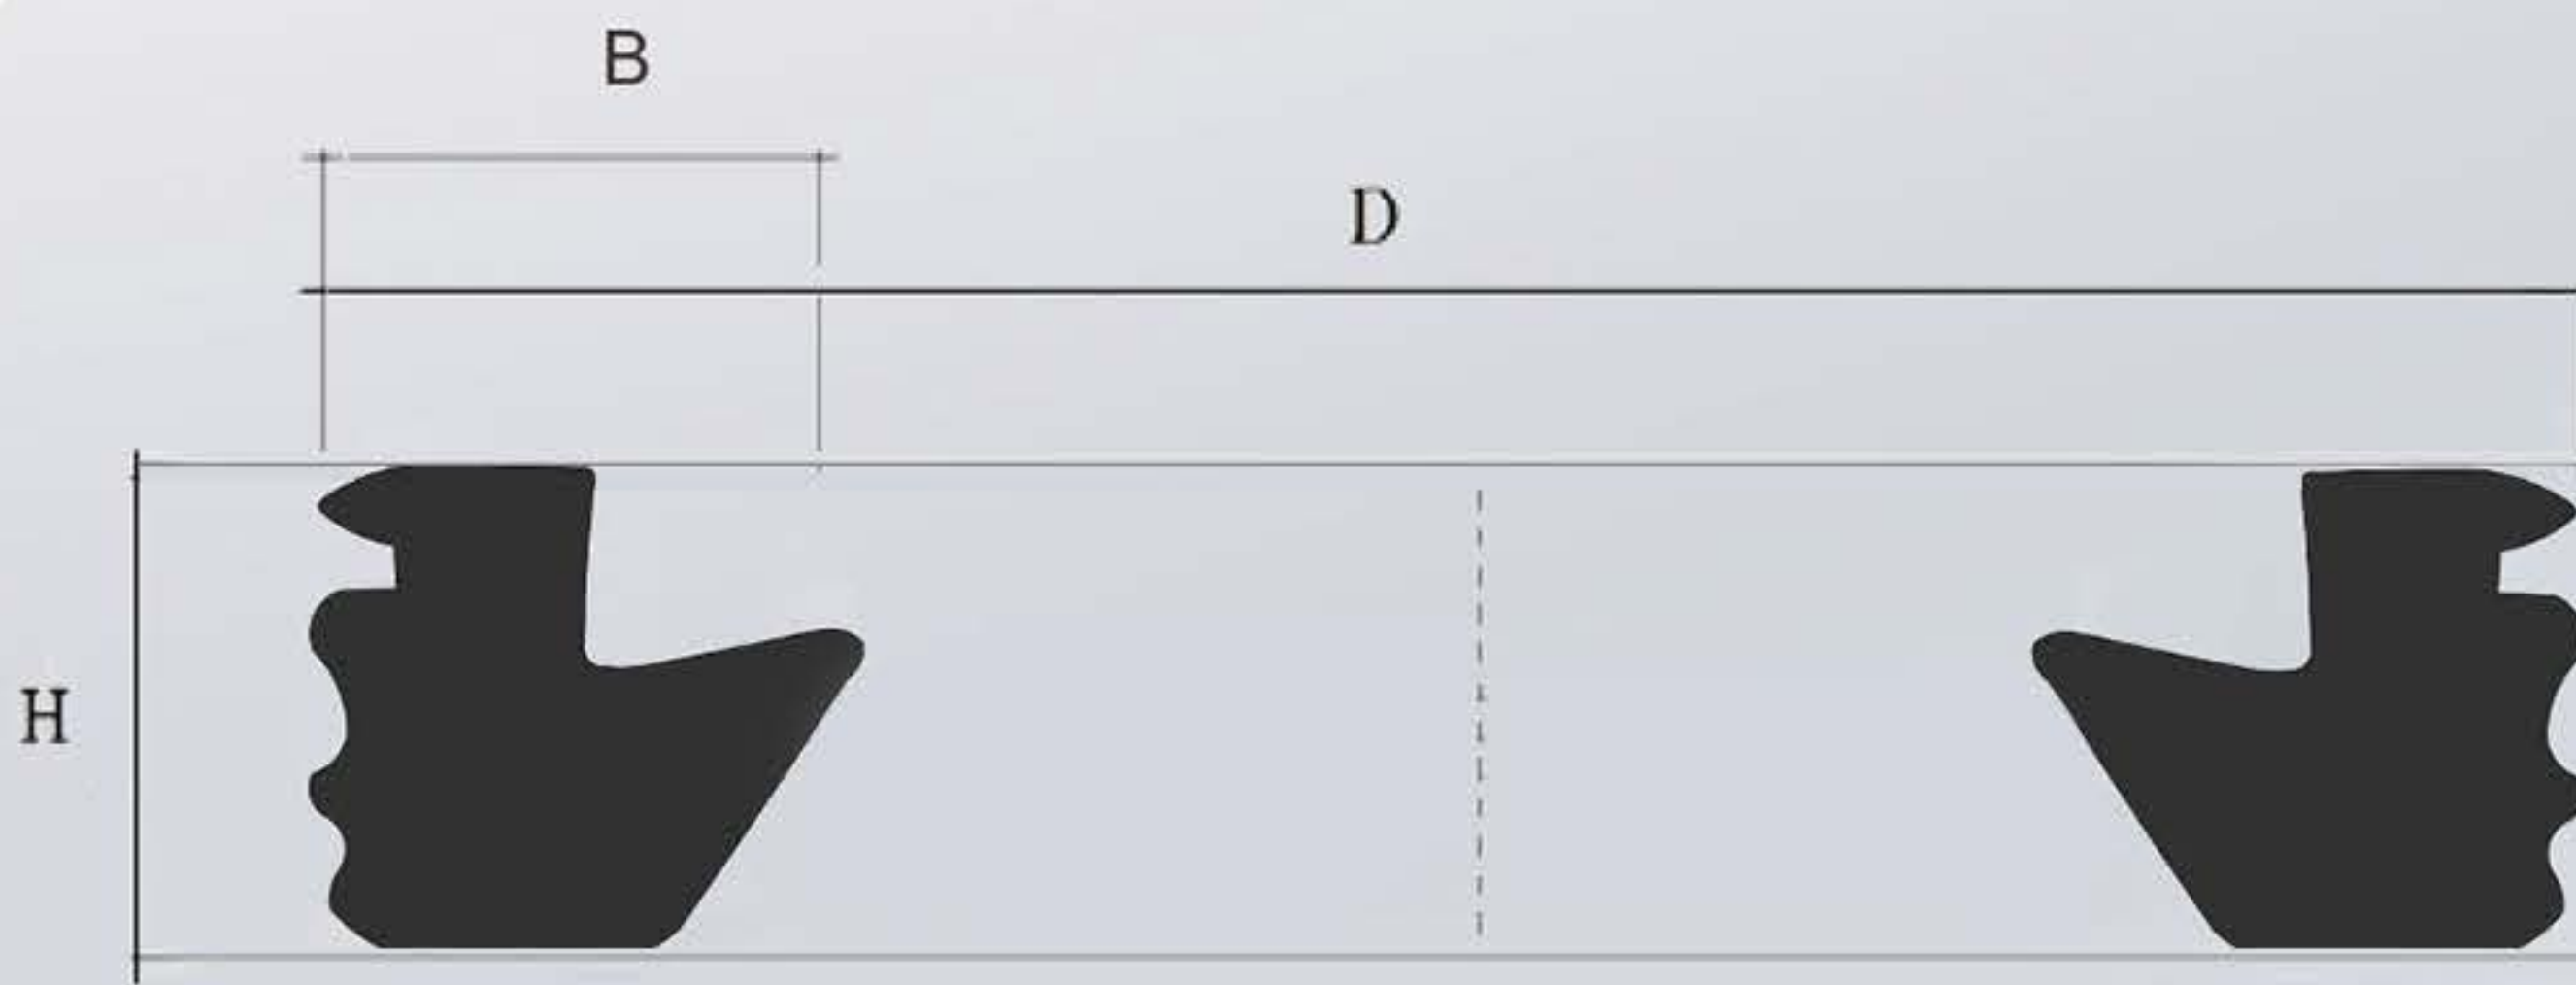

| DIN | ØD     | B     | H     |
|-----|--------|-------|-------|
| 50  | 60,80  | 6,70  | 7,90  |
| 70  | 87,72  | 7,30  | 8,20  |
| 100 | 123,80 | 8,10  | 9,55  |
| 125 | 135,00 | 9,15  | 10,00 |
| 150 | 175,00 | 11,20 | 10,45 |
| 200 | 220,00 | 13,85 | 11,50 |
| 250 | 285,00 | 16,00 | 19,50 |

CE EN 681-1

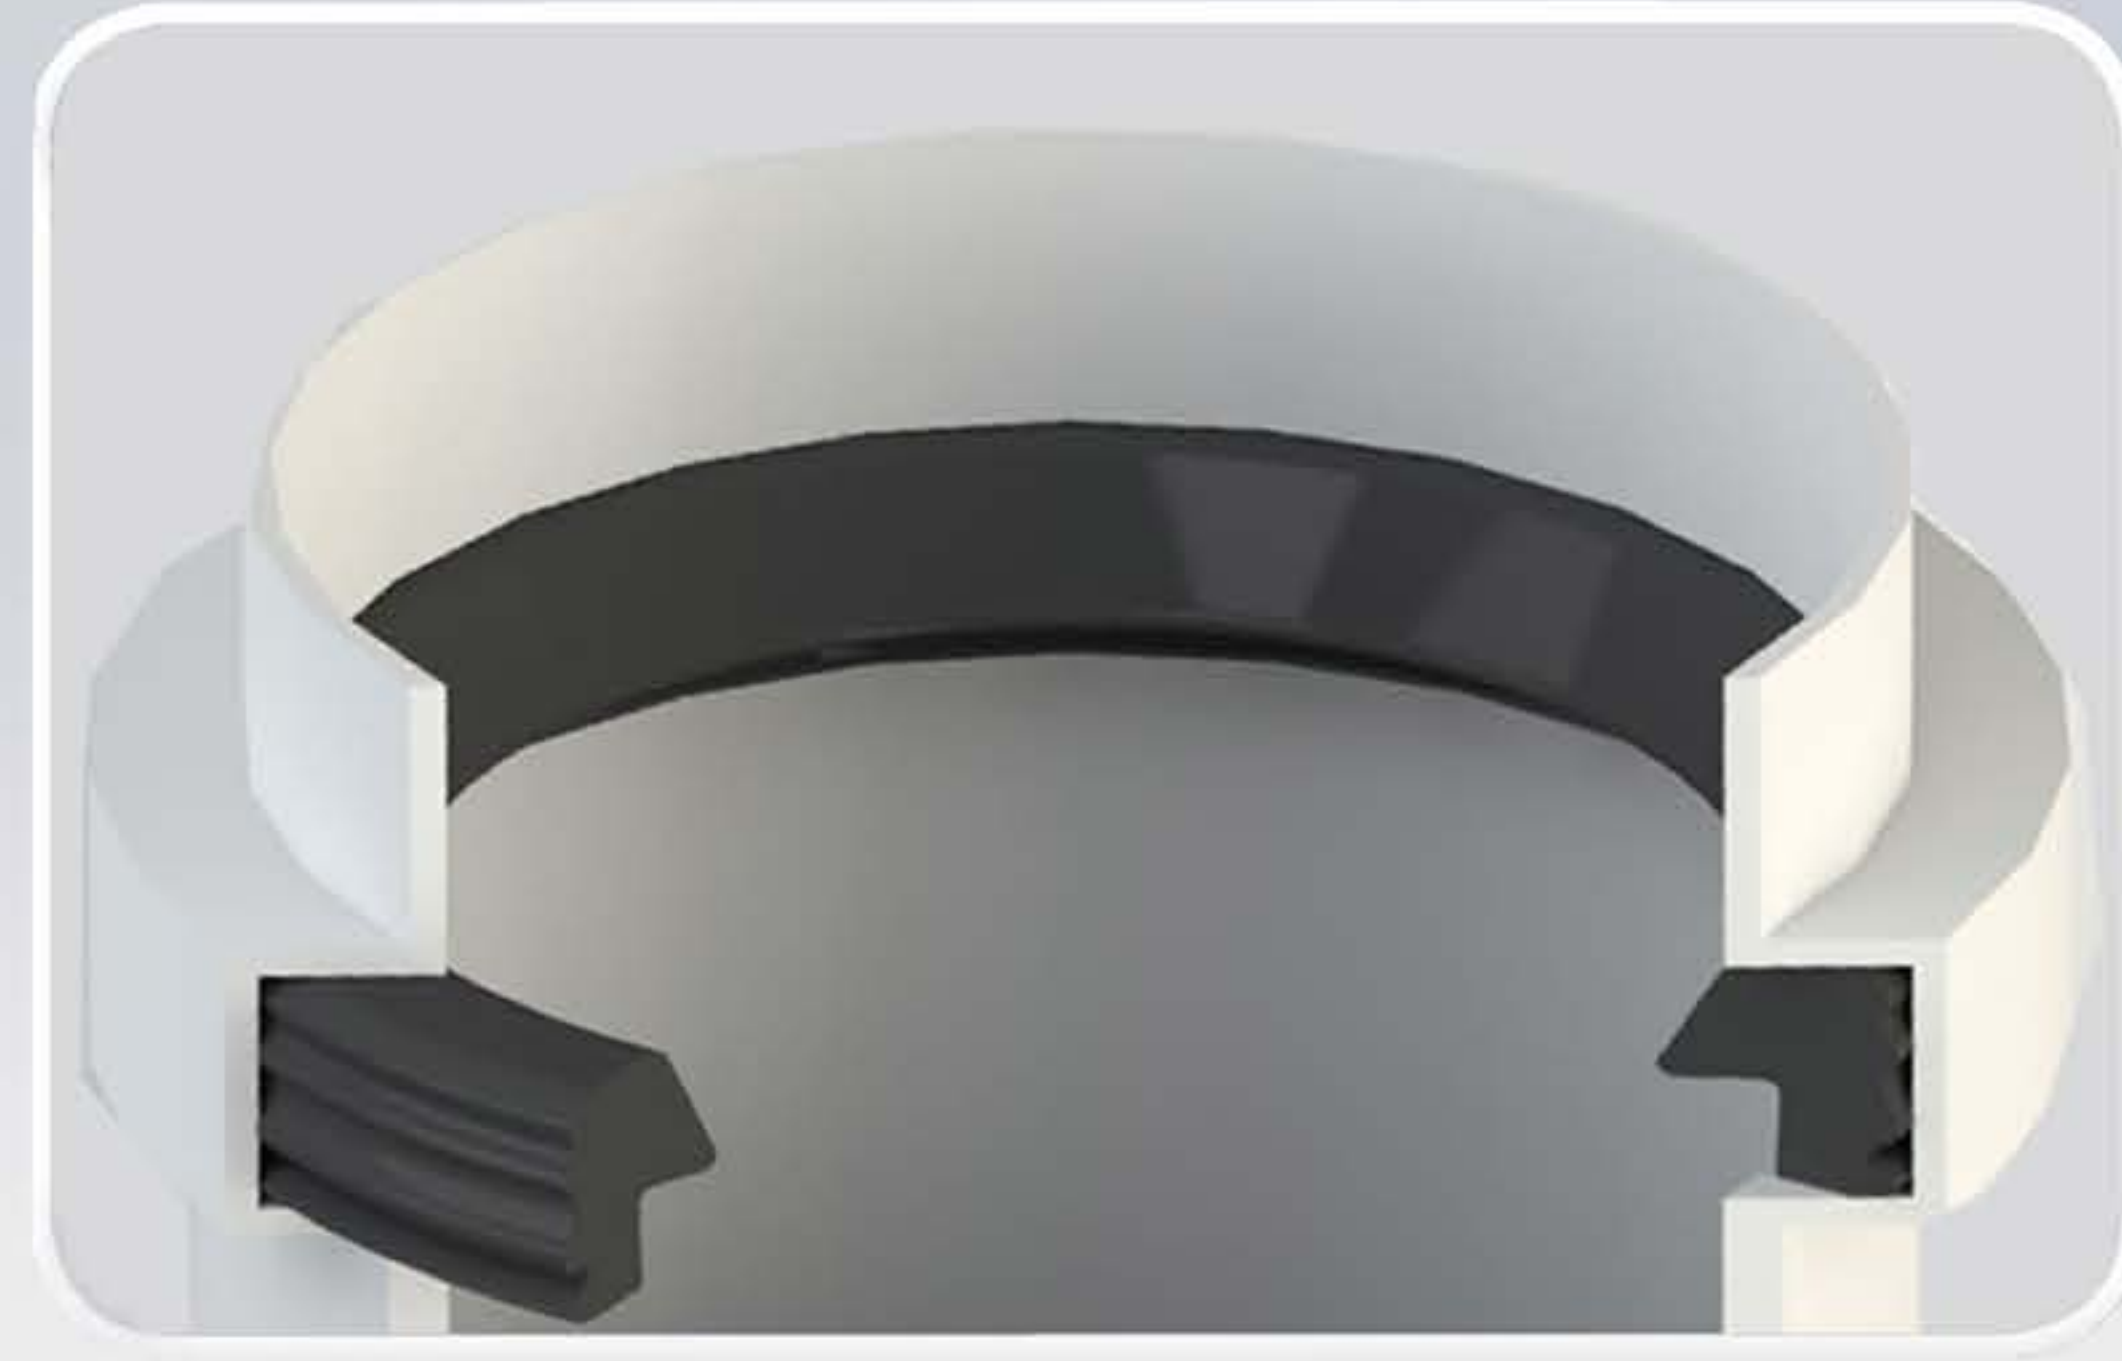





*High Quality Elastomers*

**Leader**  
RUBBER SEALING



**D SEALS FOR**  
**SEWAGE PIPES AND FITTINGS**



# TECHNICAL DATASHEET

- From
- SBR ACCORDING TO THE EUROPEAN STANDARD EN 681-1 WC
- $60 \pm 5$  IRHD
- PVC and PP sewer pipes and fittings according to European Standards EN 1401-1 and EN 1451-1

These are high quality elastomer seals in EN-681-1 norms, produced for plastic pipes made according to PVC en 1451-1 standards. It guarantees the highest quality based on years of experience and certified quality standards. Our products are produced with the latest technology involving injection moulding and robotic systems.



CE EN 681-1



| DIN | ØD     | B     | H     |
|-----|--------|-------|-------|
| 50  | 60,80  | 6,70  | 7,90  |
| 70  | 87,72  | 7,30  | 8,20  |
| 100 | 123,80 | 8,10  | 9,55  |
| 125 | 135,00 | 9,15  | 10,00 |
| 150 | 175,00 | 11,20 | 10,45 |
| 200 | 220,00 | 13,85 | 11,50 |
| 250 | 285,00 | 16,00 | 19,50 |








*High Quality Elastomers*

**Leader**  
RUBBER SEALING

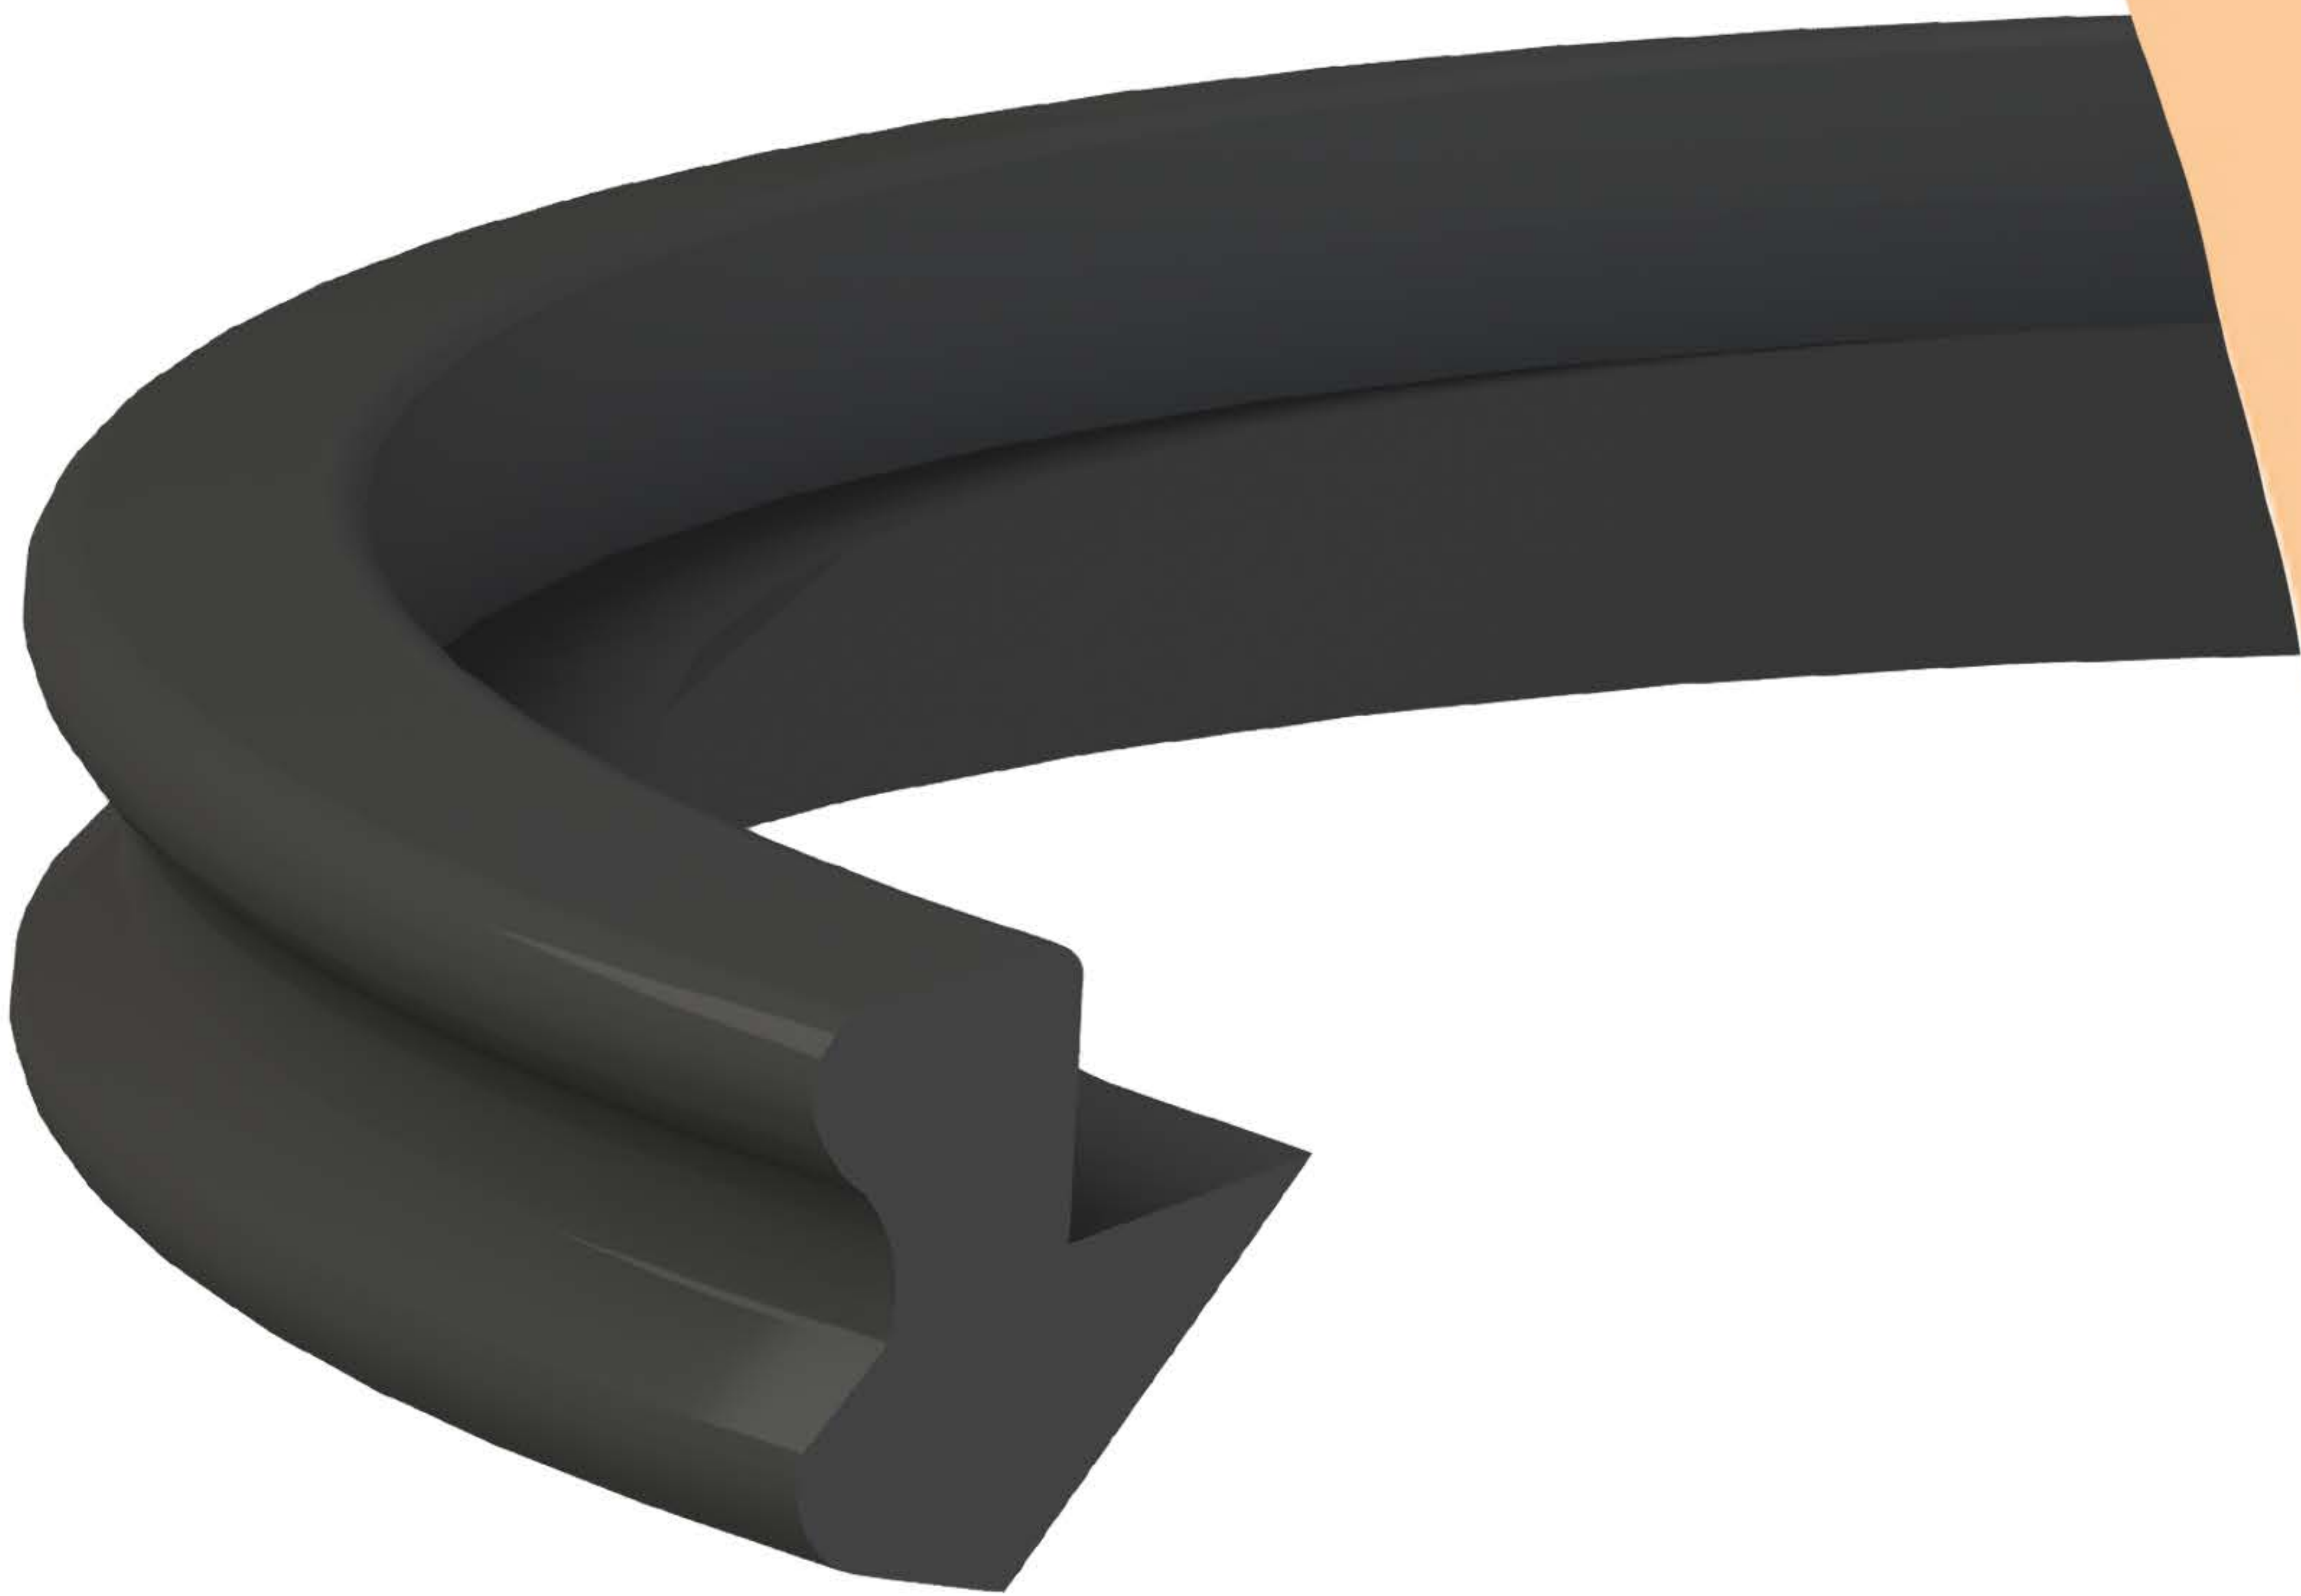


**U SEALS FOR**  
**SEWAGE PIPES AND FITTINGS**



# TECHNICAL DATASHEET

- From
- SBR ACCORDING TO THE EUROPEAN STANDARD EN 681-1 WC
- 60 ± 5 IRHD
- PVC and PP sewer pipes and fittings according to European Standards EN 1401-1 and EN 1451-1

These are high quality elastomer seals in EN-681-1 norms, produced for plastic pipes made according to PVC en 1451-1 standards. It guarantees the highest quality based on years of experience and certified quality standards. Our products are produced with the latest technology involving injection moulding and robotic systems.

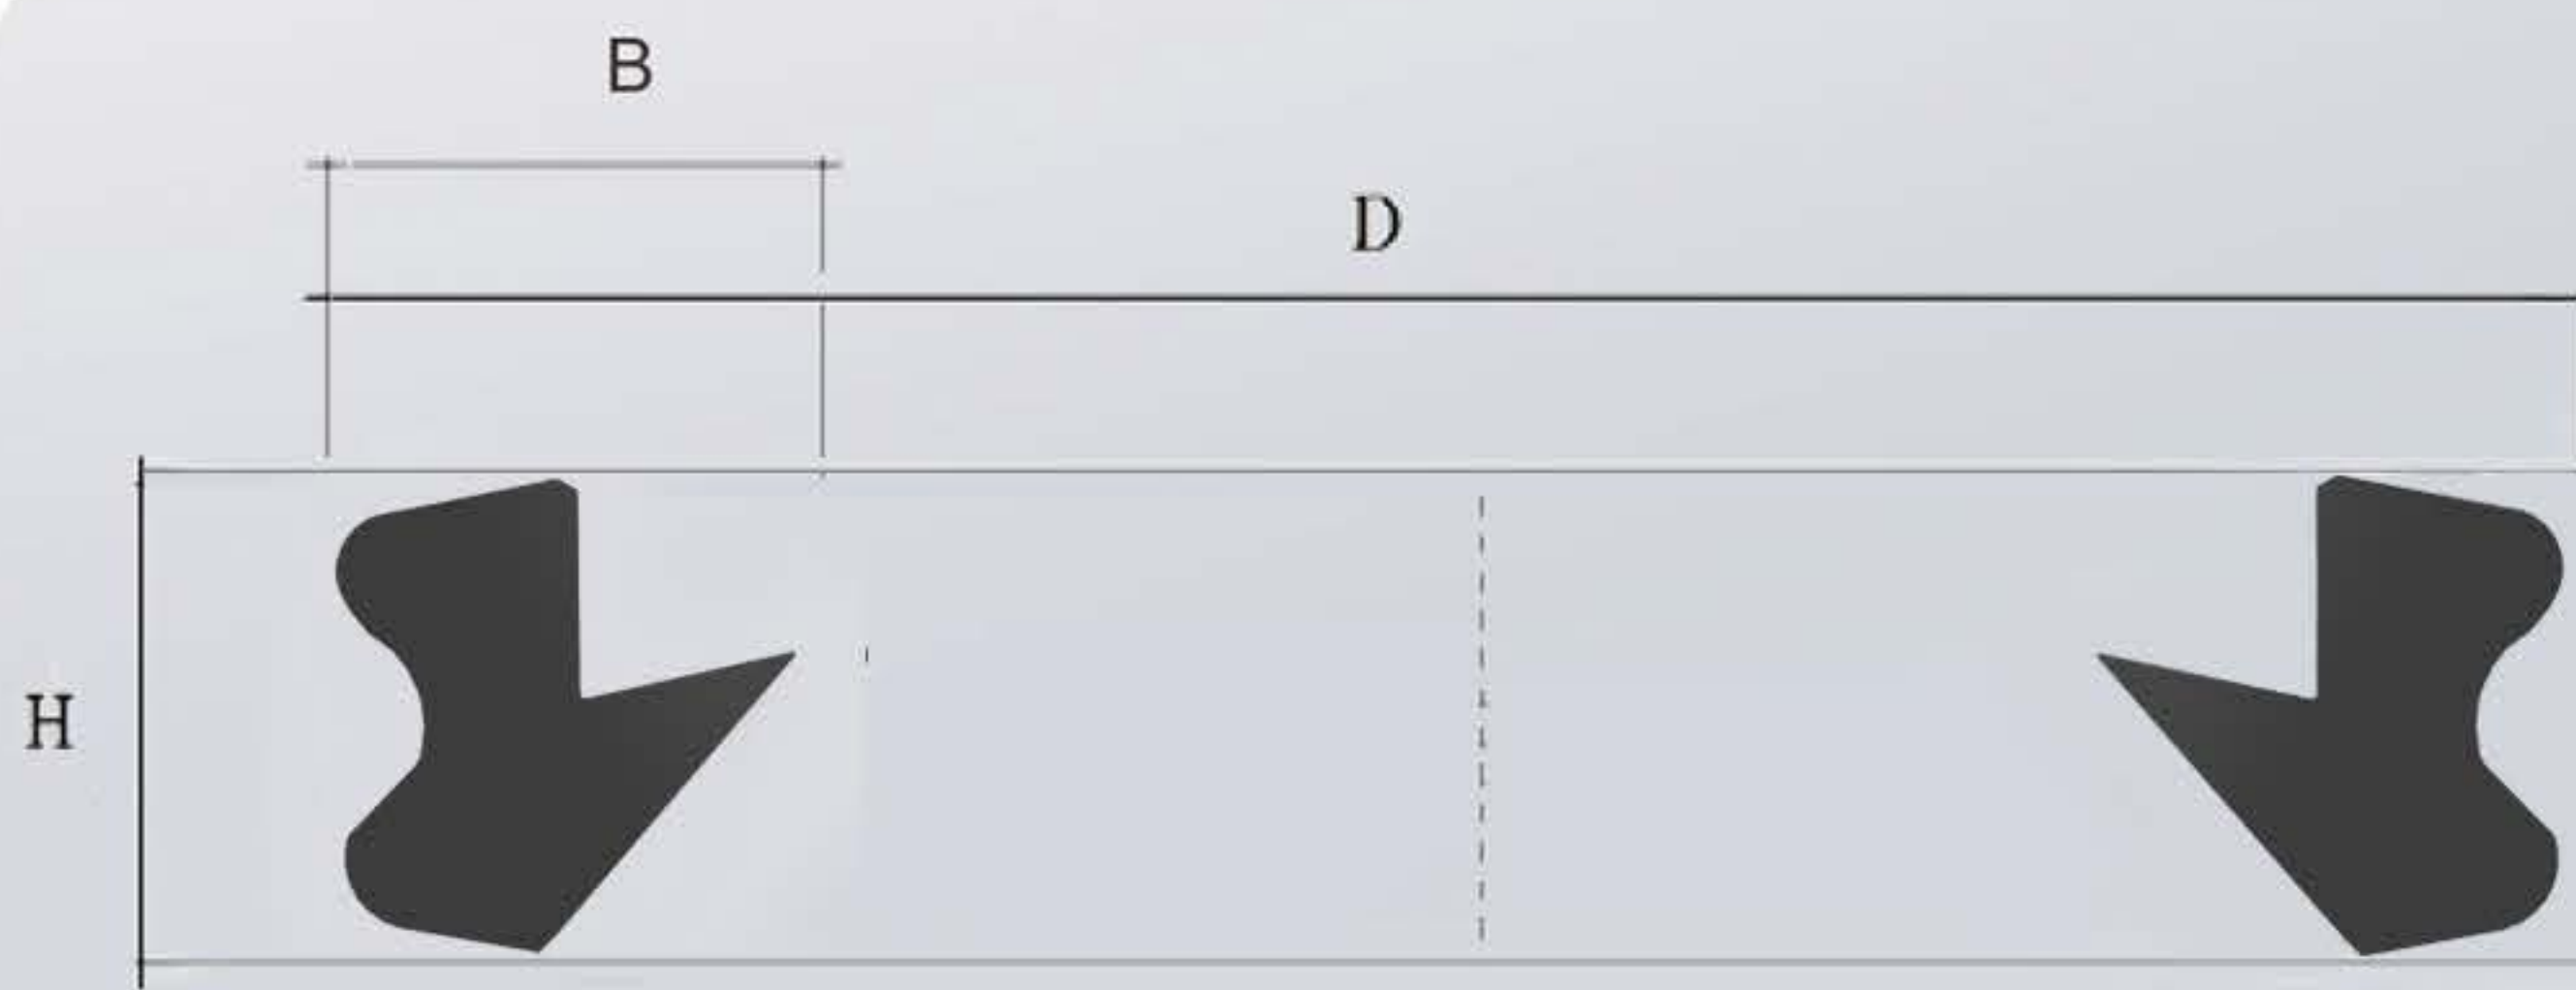

| DIN | ØD     | B     | H     |
|-----|--------|-------|-------|
| 50  | 60,80  | 6,70  | 7,90  |
| 70  | 87,72  | 7,30  | 8,20  |
| 100 | 123,80 | 8,10  | 9,55  |
| 125 | 135,00 | 9,15  | 10,00 |
| 150 | 175,00 | 11,20 | 10,45 |
| 200 | 220,00 | 13,85 | 11,50 |
| 250 | 285,00 | 16,00 | 19,50 |

CE EN 681-1







*High Quality Elastomers*

**Leader**  
RUBBER SEALING

- From Ø 90 mm to Ø 1000 mm
- SBR ACCORDING TO THE EUROPEAN
- 60 ± 5 IRHD



These are high quality elastomer seals in EN-681-1 norms, produced for plastic pipes made according to HDPE TSE En13476 standards. It guarantees the highest quality based on years of experience and certified quality standards.

**SEALS FOR  
CORRUGATED PIPES**





*High Quality Elastomers*

**Leader**  
RUBBER SEALING

- From Ø 15 mm to Ø 1000 mm
- Consists of solid metal outer and inner rings.
- Suitable for high pressure and temperature applications
- Used on raised face or flat face flanges
- Prevents turbulence and erosion damage to flange.




**SPIRAL WOUND GASKET**



# TECHNICAL DATASHEET

- From high vacuum to 400 bar
- Consists of solid metal outer and inner rings.
- Suitable for high pressure and temperature applications
- Used on raised face or flat face flanges
- Prevents turbulence and erosion damage to flange.
- Standard Filler Material : Flexible Graphite
- Metal Winding Material : Stainless Steel 316L
- Outer Ring : Carbon Steel
- Inner Ring : Stainless Steel 316L

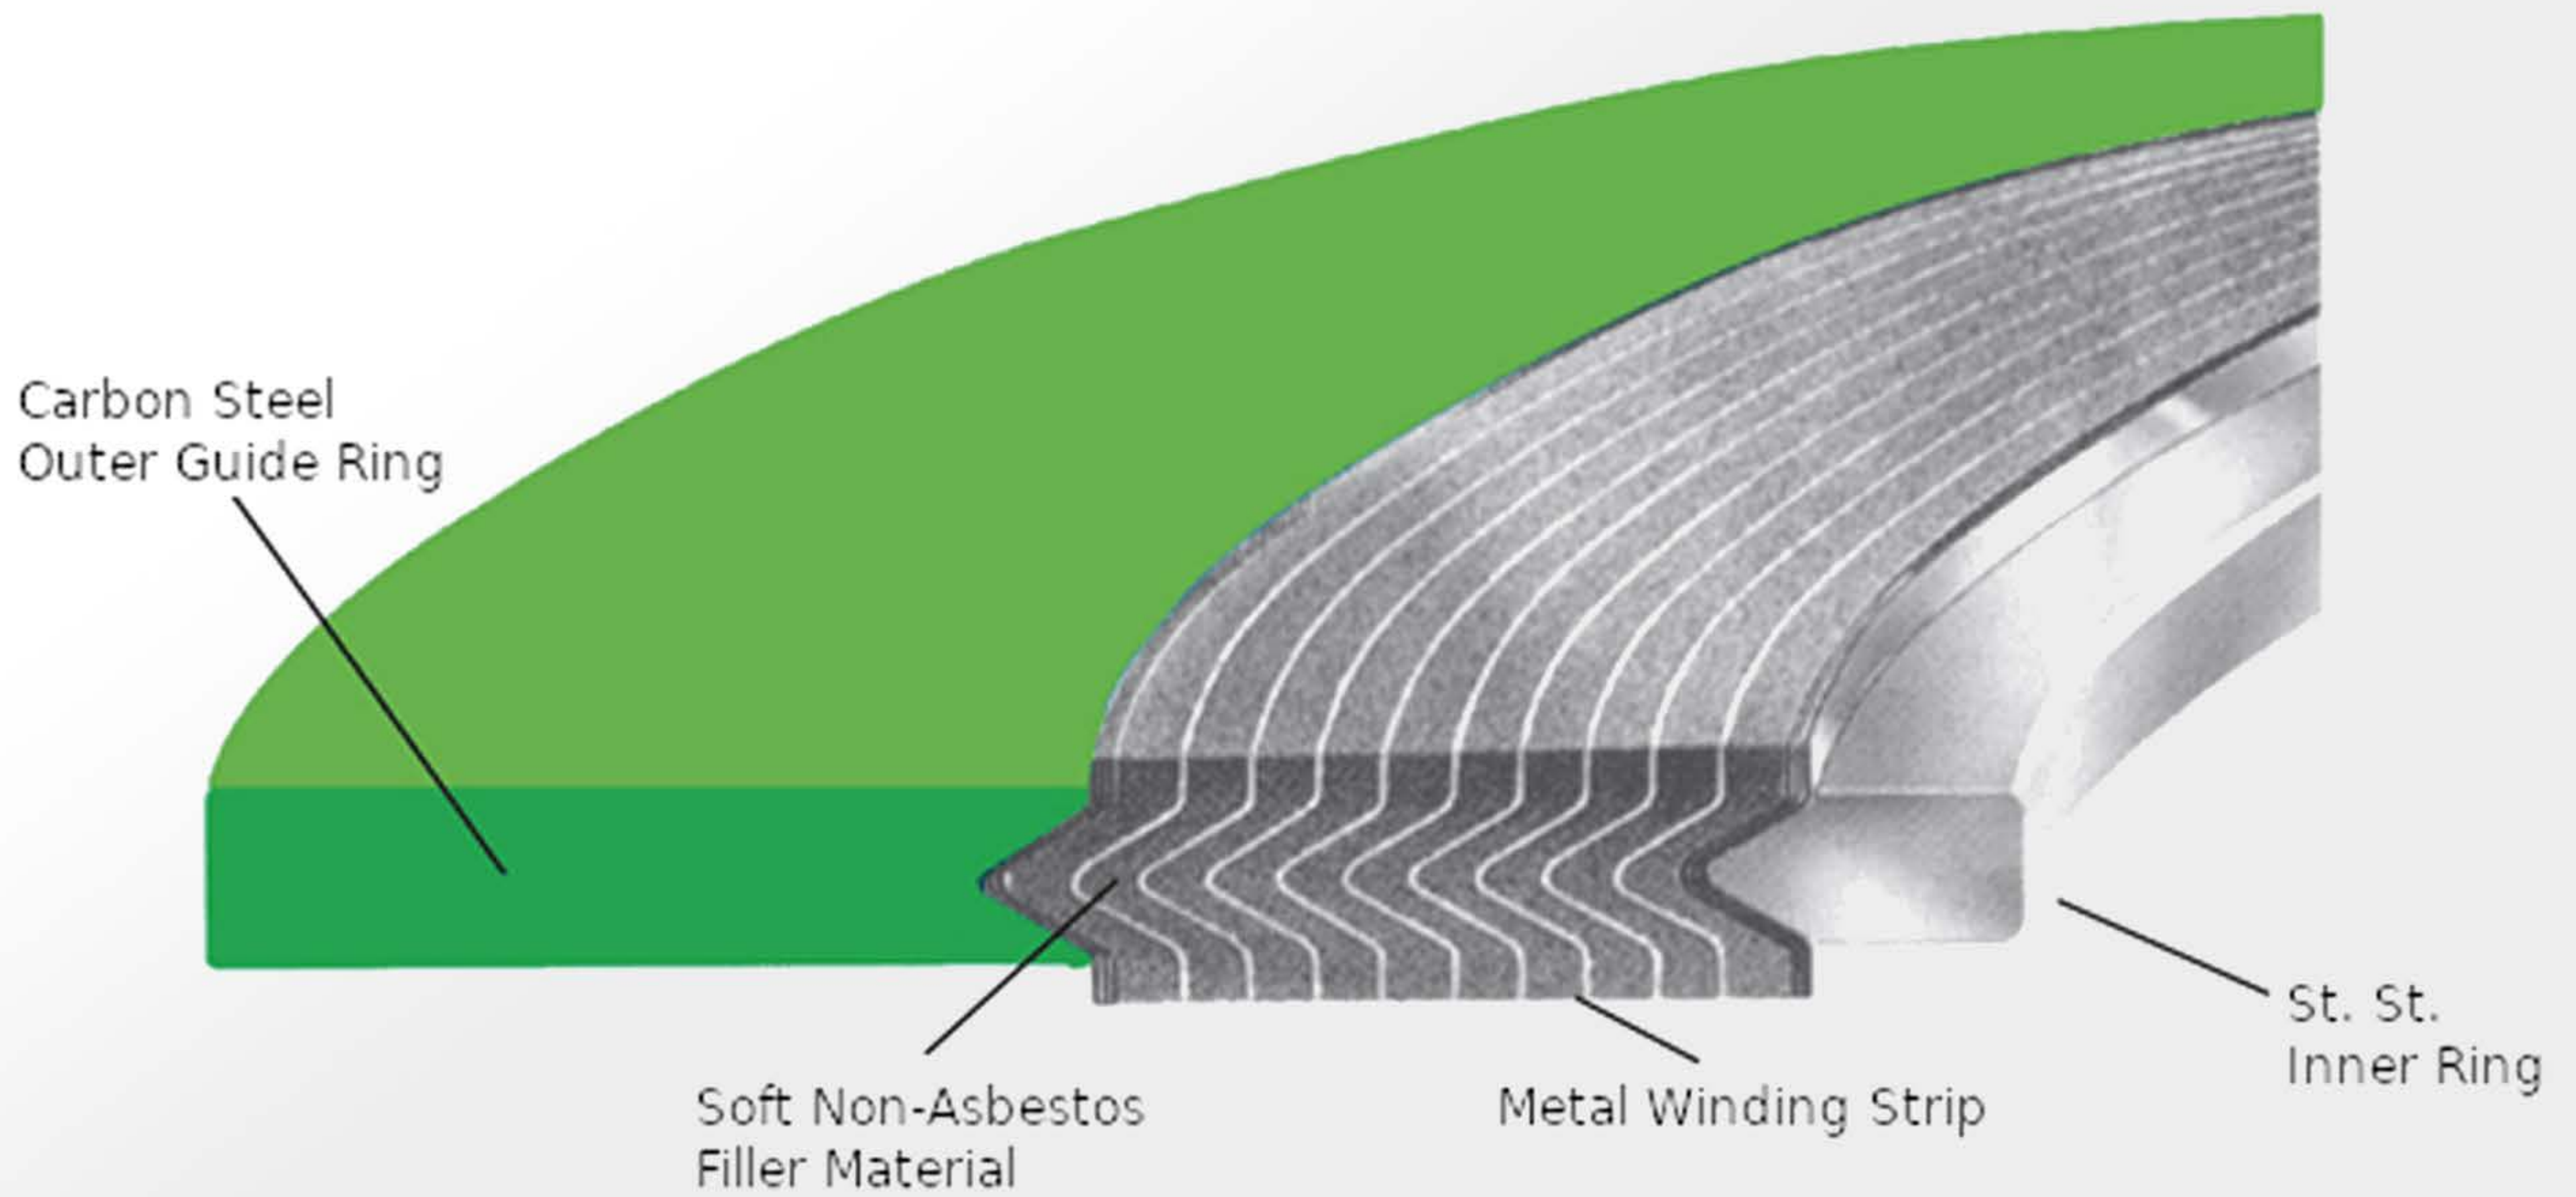





*High Quality Elastomers*

**Leader**  
RUBBER SEALING



CE EN 681-1




**ELASTOMER GASKET**  
Steel Reinforced





**Leader**  
RUBBER SEALING

*High Quality Elastomers*

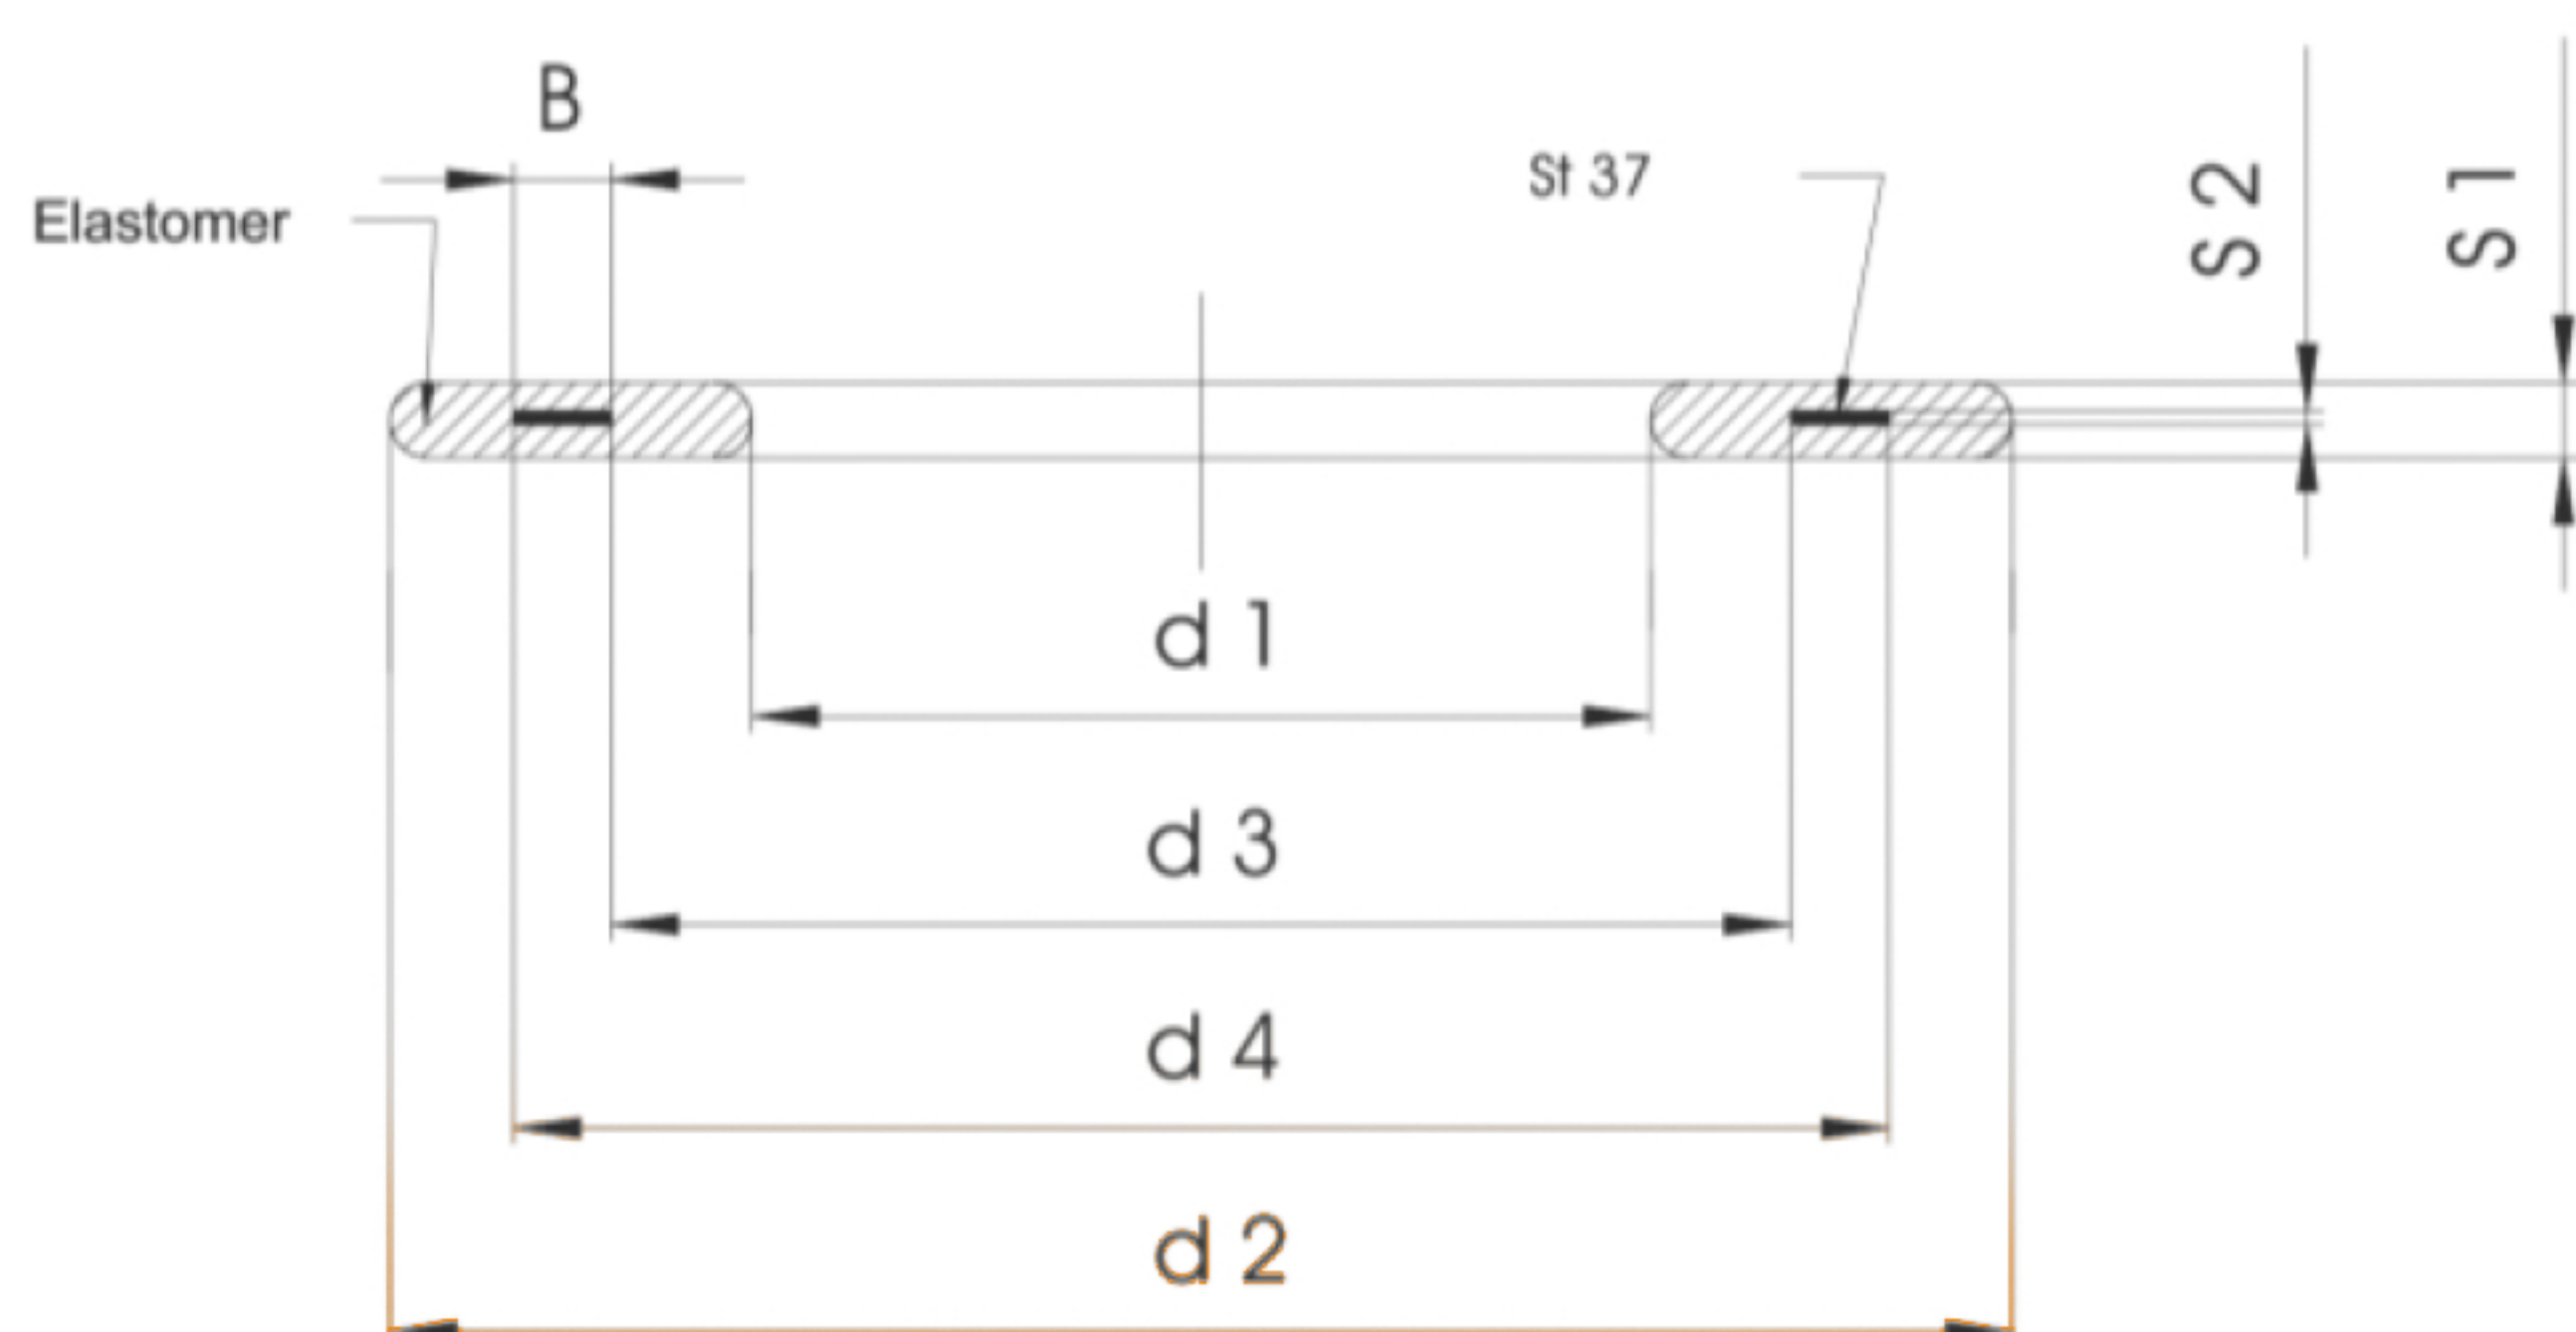

|      |      |    |      |     | PN10 |        |        | PN16 |        |        |
|------|------|----|------|-----|------|--------|--------|------|--------|--------|
| DN   | d1   | S1 | B    | S2  | d2   | d3     | d4     | d2   | d3     | d4     |
| 25   | 35   | 4  | 5,5  | 1,0 | 70   | 45,0   | 56,0   | 70   | 45,0   | 56,0   |
| 32   | 43   | 4  | 8,0  | 1,0 | 82   | 55,0   | 71,0   | 82   | 55,0   | 71,0   |
| 40   | 49   | 4  | 8,0  | 1,0 | 92   | 58,0   | 74,0   | 92   | 58,0   | 74,0   |
| 50   | 61   | 4  | 8,0  | 1,0 | 107  | 72,0   | 88,0   | 107  | 72,0   | 88,0   |
| 65   | 77   | 4  | 8,5  | 1,0 | 127  | 86,0   | 103,0  | 127  | 86,0   | 103,0  |
| 80   | 90   | 4  | 10,0 | 1,0 | 142  | 104,0  | 124,0  | 142  | 104,0  | 124,0  |
| 100  | 115  | 5  | 10,5 | 1,0 | 162  | 123,0  | 142,0  | 162  | 123,0  | 142,0  |
| 125  | 141  | 5  | 11,5 | 1,0 | 192  | 153,0  | 176,0  | 192  | 153,0  | 176,0  |
| 150  | 169  | 5  | 11,5 | 1,0 | 218  | 176,0  | 199,0  | 218  | 176,0  | 199,0  |
| 200  | 220  | 6  | 10,0 | 1,5 | 273  | 236,5  | 256,5  | 273  | 236,5  | 256,5  |
| 250  | 274  | 6  | 10,0 | 1,5 | 330  | 292,0  | 312,0  | 330  | 292,0  | 312,0  |
| 300  | 325  | 6  | 10,0 | 1,5 | 385  | 345,0  | 365,0  | 385  | 345,0  | 365,0  |
| 350  | 368  | 7  | 10,0 | 1,5 | 445  | 396,5  | 416,5  | 445  | 396,5  | 416,5  |
| 400  | 420  | 7  | 10,0 | 1,5 | 497  | 448,5  | 468,5  | 497  | 448,5  | 468,5  |
| 450  | 470  | 7  | 16,0 | 2,0 | 557  | 497,5  | 529,5  | 557  | 497,5  | 529,5  |
| 500  | 520  | 7  | 16,0 | 2,0 | 595  | 541,5  | 573,5  | 618  | 553,0  | 585,0  |
| 600  | 620  | 7  | 16,0 | 2,0 | 695  | 641,5  | 673,5  | 735  | 661,5  | 693,5  |
| 700  | 720  | 8  | 16,0 | 2,0 | 805  | 746,5  | 778,5  | 805  | 746,5  | 778,5  |
| 800  | 820  | 8  | 16,0 | 2,0 | 910  | 849,0  | 881,0  | 910  | 849,0  | 881,0  |
| 900  | 920  | 8  | 16,0 | 2,0 | 1010 | 949,0  | 981,0  | 1010 | 949,0  | 981,0  |
| 1000 | 1020 | 8  | 16,0 | 2,0 | 1125 | 1056,5 | 1088,5 | 1125 | 1056,5 | 1088,5 |
| 1200 | 1220 | 8  | 16,0 | 2,0 | 1340 | 1264,0 | 1296,0 | 1340 | 1264,0 | 1296,0 |
| 1400 | 1420 | 8  | 20,0 | 3,0 | 1545 | 1462,5 | 1502,5 | 1545 | 1462,5 | 1502,5 |
| 1600 | 1620 | 8  | 20,0 | 3,0 | 1770 | 1675,0 | 1715,0 | 1770 | 1675,0 | 1715,0 |
| 1800 | 1820 | 8  | 30,0 | 3,0 | 1970 | 1865,0 | 1925,0 | 1970 | 1865,0 | 1925,0 |
| 2000 | 2020 | 10 | 30,0 | 3,0 | 2175 | 2066,5 | 2126,5 | 2175 | 2066,5 | 2126,5 |
| 2200 | 2220 | 10 | 30,0 | 3,0 | 2384 | 2272   | 2332   | 2384 | 2272   | 2332   |
| 2500 | 2520 | 10 | 30,0 | 3,0 | 2680 | 2570   | 2630   | 2680 | 2570   | 2630   |

## ELASTOMER GASKET

### Steel Reinforced



40.yıl



HIGH QUALITY ELASTOMERS

Merkez (Office): Anafartalar Mah. Mehmet Karagöz Cad. Uçar Tic. Merk. No:5/132-134

Tel : +9 0312 310 71 64 Faks : +9 0312 310 75 24 Ulus - ANKARA / TURKEY

Fabrika (Factory): Has Emek San. Sit.1468. Cad. (24. Cad) No:55 İvedik OSB / ANKARA / TURKEY

Tel: +9 0312 395 04 01 • Faks: +9 0312 395 05 85

[lcs@liderconta.com](mailto:lcs@liderconta.com) • [lider@liderconta.com](mailto:lider@liderconta.com) • [info@ekoer.com.tr](mailto:info@ekoer.com.tr)

[www.lcsrubber.com](http://www.lcsrubber.com) - [www.liderconta.com.tr](http://www.liderconta.com.tr) - [www.ekoer.com.tr](http://www.ekoer.com.tr)

**Lider**

CONTA İMALATI & İNŞ. MALZ.  
SANAYİ & TİCARET LTD. ŞTİ.

